

ILS

Energy saving and solar reflection for rolling screen applications







Designed for endurance and smooth rolling, ILS combines high heat retention with effective shading and light diffusion. The heat retention brings energy savings, while solar reflection protects plants from heat radiation on warm days. The greenhouse climate is stabilized and growth is enhanced by the more even light distribution.



All Svensson inside screens can be used under all types of greenhouse cover. They are UV stable and remain clean and effective for a long time.



☀ = Light transmission in sunlight

☁ = Light transmission when overcast

||| = Energy saving

	☀	☁	
 ILS CLEAR	83%	77%	47%
 ILS ULTRA	87%	77%	45%
 ILS 50 ULTRA	51%	46%	55%
 ILS 60 ULTRA	35%	32%	60%
 ILS 70 ULTRA	28%	25%	65%
 ILS A/A	4%	5%	70%

 Aluminium strip
 Transparent strip

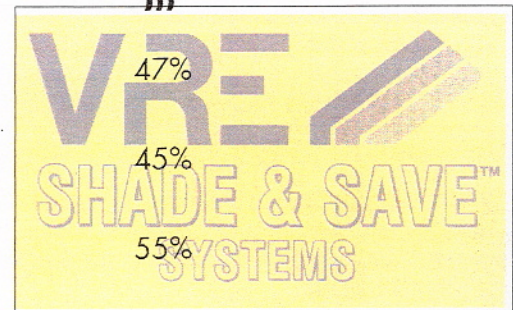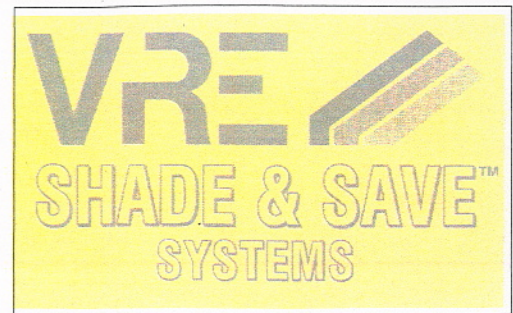

Warranty: 5 years under all types of greenhouse covering, see Svensson's limited warranty for all terms, conditions and exclusions in writing.

This sample is for illustrative purposes only and may vary in appearance and design from the delivered product. Although the information in this sample card has been composed with care, Svensson does not accept any liability in respect of its accuracy. Further information concerning the product and its installation may be obtained from Svensson and its authorized distributors. Svensson's products and name are protected by patent and other intellectual property rights. The REVOLUX product range is flame retardant. No other products delivered by Svensson are flame retardant. AB Ludvig Svensson is an ISO 14001/9001 certified company.